
DRYING CONTAINER WITH AGITATOR


PRODUCT DATA SHEET

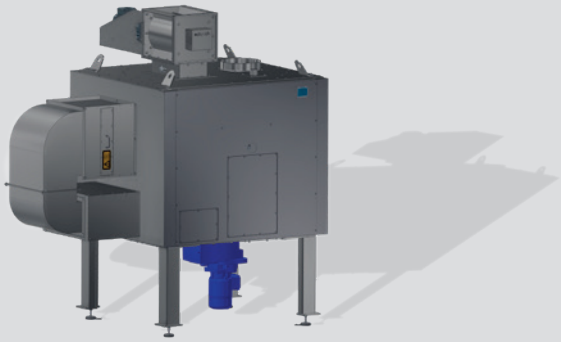

Even drying, constant material conveyance and optimum air circulation for moist bulk materials

TECHNICAL DATA

Container dimensions (W×D×H)	1,465 × 1,465 × 1,220 mm
Total height	2,400 mm
Volume	1 m³
Drying capacity	21 kW
Painting	RAL 9005
Fall-out nominal width	300 × 300 mm
Geared motor	Manufacturer NORD
Drive output	1.1 kW
Output speed	5.6 U/min
Rotary valve	zsl 0315-nk25
Drive output	0.75 kW
Output speed	25 U/min

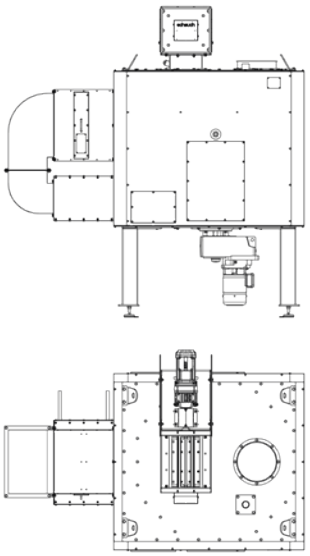

DESIGN

- Integrated agitator
- Fuel-optimisation
- With integrated dust cyclone
- High energy efficiency

FURTHER OPTIONS

- Container extended by 1,000 mm
- Feet extended by 1,000 mm
- Dust separation
- Level monitoring

Data sheet number: 202607
Subject to technical changes.

Scheuch COMPONENTS GmbH
Weierfing 68, 4971 Aurolzmünster
Austria

Phone +43 7752 905 - 0
E-Mail office@scheuch-components.com
Web www.scheuch-components.com

For more information on the drying container, see our website.